
PEGASUS

INSTAFLASH® 2

Rafter or Deck Attach!

- No pilot holes
- Pre-installed sealant
- No caulking, no ripping shingles



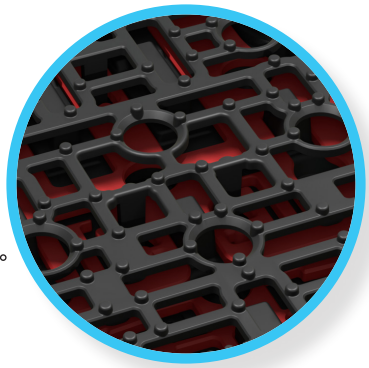

Pre-installed sealant

Before: Sealant contained by protective cage. No contact with hands or tools.



Install in any season

Install in 0 to 250° F weather, including rain and sleet. Watertight for life.



Instant, watertight seal

After: Non-hardening sealant automatically fills all gaps, overlays and butt joints.

The Ultimate Comp Roof Attachment

Simple to use. Works for rafter or deck attach. No caulking, no ripped shingles, no mess. Pre-installed sealant acts as a chemical flashing and fills all gaps, voids, and butt joints for an instant, watertight seal.

25-Year Warranty

Manufactured with advanced materials and coatings to outlast the roof itself

Code Compliant

Fully IBC/CBC code compliant
Exceeds ASCE 7-22 standards
UL2703 certified

Self-Healing

Proprietary non-hardening sealant will flex and reseal over years of thermal expansion and contraction

Larger Spans


Extra-large L-foot and proprietary screws result in larger spans between mounts

Pegasus | 506 West Ohio Avenue, Richmond, CA 94804 | **www.pegasussolar.com**

PEGASUS

INSTAFLASH 2

1
Release Safety.



2
Install screw through center hole, and drive into roof until InstaFlash2 pushes through cage and seats onto the roof.



3
If screw hits rafter, drive second screw in hole above. Ensure screws are embedded at least 2.5" into rafter. Installation complete.



4
If first screw misses rafter, install second screw into the left or right screw holes over rafter.




5
Continue until 2 screws are embedded at least 2.5" into rafter.





6
For deck attach, use 6 screws.

Note: Deck attach may reduce max span.




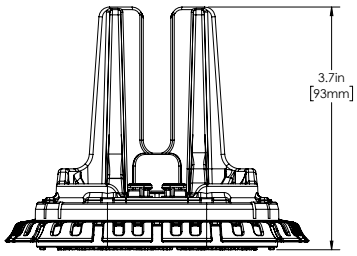





RAFTER ATTACH - 2 FASTENERS



DECK ATTACH - 6 FASTENERS

SPECIFICATIONS	INSTAFLASH KITS			
	PIF2-B0	PIF2-BDT	PIF2-M0	PIF2-MDT
Finish	Black		Mill	
Kit Contents	Black InstaFlash2	Black InstaFlash2, Dovetail T-bolt	Mill InstaFlash2	Mill InstaFlash2, Dovetail T-bolt
Attachment Type	Rafter & Deck Attach			
Roof Fasteners	1/2" Socket Driven; PF-DRW85 or PF-SF70			
Roof Type	Sloped Roof: Composition Shingle, Rolled Asphalt | Flat Roof: Modified Bitumen Roof, Built-Up Roof			
Flashing Type	Factory Installed Non-Drying, Non-Skinning Butyl Based Chemical Flashing			
Installation Temperature	0° F to 250° F			
Cure Time	Instantly Waterproof; Non-Hardening			
Service Temperature	-40° F to 250° F			
Certifications	IBC, ASCE/SEI 7-16 & 7-22, UL2703			
Install Application	Most Railed Systems			
Kit Quantity	24			
Boxes Per Pallet	36			

C US

SCAN FOR INSTALLATION VIDEO

SCAN FOR FREE TRIAL

See www.ps-ip.com for intellectual property details. All rights reserved. ©2025 Pegasus Solar Inc.